

## Heil Sound Suggested Accessories



All in and out of warranty items returned must be accompanied by a completed repair form, which can be found at <http://heilsound.com/amateur/repairs>  
Heil Sound, Ltd. warrants these products to the original purchaser for a period of one year parts and 90 days labor from the date of purchase. It does not cover accidental or intentional damage. Heil Sound, Ltd. is not responsible for loss, damage or expenses that arise from the use or the inability to use this product.

Heil Sound, Ltd.  
5800 North Illinois Fairview Heights, IL 62208  
618.257.3000 (phone) 618.257.3001 (fax)  
[info@heilsound.com](mailto:info@heilsound.com)



[www.heilsound.com](http://www.heilsound.com)

9/2014



PR10 PACKAGE



The PR 10 Package features the compact PR10 microphone, an LB-1 table base, and an adjustable 8" mic boom.


# PR 10 PACKAGE

From the amateur radio division of Heil Sound, Ltd., we bring you the PR10 Package. This small but mighty microphone will bring your radio to life with full speech articulation and perfect balance. This package contains Heil's compact PR10 microphone, an LB-1 table base with an LED backlit transmit status light, and an adjustable 8" mic boom to bring the mic up to a comfortable operating position during use.

The PR10 is Heil's newest communication microphone designed for articulate communication with most of today's transceivers. Although compact in size this microphone is built around a full 1-1/8" diameter dynamic element, just as our other PR series microphones used in commercial broadcast applications around the world. Producing full articulate sound from 85Hz to 16kHz you will be sure to be heard with every transmission. Some Non-Pro series Icom transceivers do not have adequate mic pre amplification to support a dynamic element and an external preamplifier may be required. Please check with your authorized Heil Dealer or visit [www.heilsound.com](http://www.heilsound.com) for these applications and compatibility.

The PR10 Package includes a LB-1 table base. This sleek, sturdy table base will keep your PR10 microphone at a comfortable height for hours of use. Integrated into the base we have a PTT control and an LED backlit indicator with three settings. The LEDs that illuminate the face and ring of the LB-1 base may be set to continuously glow, illuminate only while transmitting, or turned off with the three-position switch located on the right side of the base. Like our popular CB-1-PTT base, the LB-1 base has a 1/8" jack on the back and includes a 24" pigtail to interconnect the base to the proper CC-1 connecting cable. LB-1 requires 2-AA batteries for illumination.

\* A CC-1-XLR series cable is needed to interface this microphone with a transceiver. Please visit [www.heilsound.com/amateur/adapters](http://www.heilsound.com/amateur/adapters) for proper interface cable.

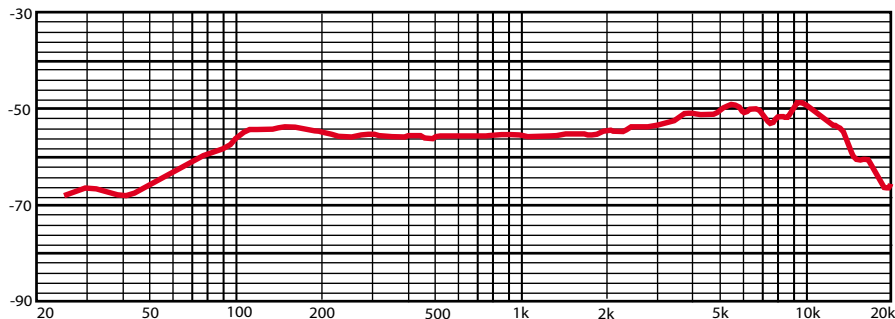



\* Please note the boom extension included with this product is a 3-pin XLR and is not compatible with 4-pin microphones.

Output Connection	3 pin XLR PR 10
Generating Element	Heil Dynamic
Frequency Response	85 Hz - 16 kHz
Polar Pattern	Cardioid
Impedance	600 ohms balanced
Output Level	-55 dB @ 1,000 Hz
Diaphragm	1 1/8" Low-mass aluminum
Weight	PR 10: 12 oz LB-1: 22.5 oz
Finish	Black Satin Epoxy



PTT Output

LED Selector Switch  
ON OFF PTT Control

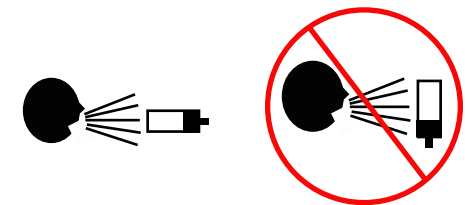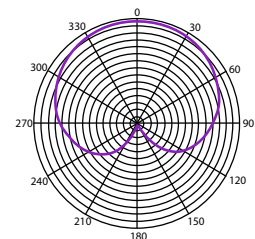

**!!! ATTENTION !!!**  
This is an END - FIRE microphone. Audio is acquired from the END of this microphone, NOT the side.